


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | | |
|---|--|--|--|
| (51) International Patent Classification ⁷ : H01Q 1/27 | | A1 | (11) International Publication Number: WO 00/70710 |
| | | | (43) International Publication Date: 23 November 2000 (23.11.00) |
| (21) International Application Number: PCT/KR00/00449 | | (81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). | |
| (22) International Filing Date: 12 May 2000 (12.05.00) | | | |
| (30) Priority Data: 1999/17190 13 May 1999 (13.05.99) KR 1999/17191 13 May 1999 (13.05.99) KR 2000/7613 17 February 2000 (17.02.00) KR | | | |
| (71) Applicant (for all designated States except US): K-CERA INC. [KR/KR]; 38-11, Neung-ri, Taean-eup, Kyungki-do, Hwaseong-kun 445-970 (KR). | | | |
| (72) Inventors; and (75) Inventors/Applicants (for US only): KOO, Ki-Duk [KR/KR]; Seongji Apt. 710-902, Salgoo-gol, Youngtong-dong 988-2, Paldal-ku, Kyungki-do, Suwon-city 441-470 (KR). CHANG, Dong-Seok [KR/KR]; Dongseong-hanareum Apt. 302-1303, Bijeon 2-dong 877, Kyungki-do, Pyeongtaek-city 450-152 (KR). KIM, Hyung-Jong [KR/KR]; Seongsu2ga 2-dong 671-254, Seongdong-ku, Seoul 133-112 (KR). | | Published With international search report. | |
| (74) Agent: KIM, Won-Ho; Teheran Bldg., 825-33, Yoksam-dong, Kangnam-ku, Seoul 135-080 (KR). | | | |

(54) Title: HELICAL ANTENNA MANUFACTURING APPARATUS AND METHOD THEREOF

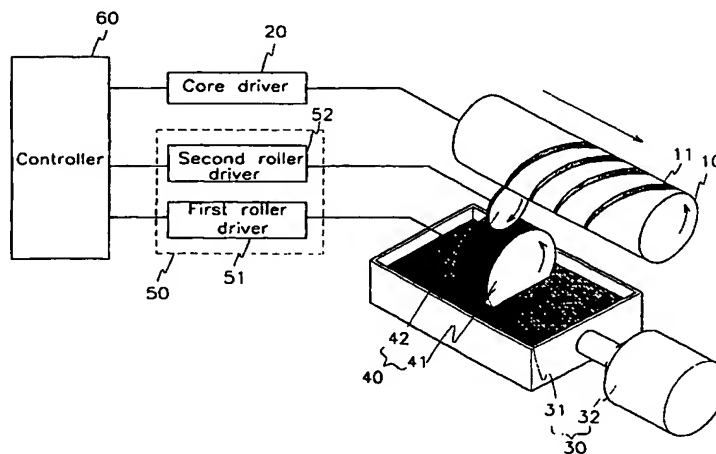

(57) Abstract

Disclosed is a helical antenna manufacturing apparatus and method. A controller controls a core driver and a roller driver to rotate a core and a roller according to an rpm which is pre-set according to diameters of the core and the roller, and controls the core driver to move the core in a longitudinal direction according to the moving speed which is set according to working frequency bands of the antenna. When the core and the roller are contacted, they are rotated in opposite directions, and as the roller is rotated, a paste in a paste box moves together with a surface of the core and is printed on the surface of the core. As the core is rotated and moved in the longitudinal direction, a helical line is formed on the core. Pitches of the helical line formed on the core is changed according to the moving speed of the core in the longitudinal direction, and the working frequency bands of the antenna are changed according to the pitches of the helical line. Also, a helical line unit including a plurality of helical lines having different pitches printed on the surface of the core can be formed by controlling the core driver to move the core in the longitudinal direction according to the moving speeds which are set for the respective steps according to the working frequency bands of the antenna.